

**the
box**

MA100
full-range speaker

Musikhaus Thomann e.K.

Treppendorf 30

96138 Burgebrach

Germany

Telephone: +49 (0) 9546 9223-0

E-mail: info@thomann.de

Internet: www.thomann.de

13.05.2013

Table of contents

1	General notes	4
2	Safety instructions	7
3	Features	11
4	Installation	12
	4.1 Pin assignment.....	14
	4.2 Tips on handling speakers.....	16
5	Operating elements	17
6	Technical specifications	21
7	Protecting the environment	23

1 General notes

This user manual contains important information on safe operation of the device. Read and follow all safety notes and all instructions. Save this manual for future reference. Make sure that it is available to all persons using this device. If you sell the device to other users, be sure that they also receive this manual.

Our products are subject to a process of continuous development. We therefore reserve the right to make changes without notice.

Symbols and signal words

This section provides an overview of the symbols and signal words used in this user manual.

Signal word	Meaning
DANGER!	This combination of symbol and signal word indicates an immediate dangerous situation that will result in death or serious injury if it is not avoided.
WARNING!	This combination of symbol and signal word indicates a possible dangerous situation that can result in death or serious injury if it is not avoided.
CAUTION!	This combination of symbol and signal word indicates a possible dangerous situation that can result in minor injury if it is not avoided.
NOTICE!	This combination of symbol and signal word indicates a possible dangerous situation that can result in material and environmental damage if it is not avoided.

Warning signs	Type of danger
 A yellow triangular warning sign with a black border and a black lightning bolt symbol in the center.	Warning – high-voltage.
 A yellow triangular warning sign with a black border and a black symbol of a person standing on a suspended load.	Warning – suspended load.
 A yellow triangular warning sign with a black border and a black exclamation mark in the center.	Warning – danger zone.

2 Safety instructions

Intended use

This device is intended to be used in a sound reinforcement system. Use the device only as described in this user manual. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

This device may be used only by persons with sufficient physical, sensorial, and intellectual abilities and having corresponding knowledge and experience. Other persons may use this device only if they are supervised or instructed by a person who is responsible for their safety.



DANGER!

Danger for children

Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard!

Ensure that children do not detach any small parts (e.g. knobs or the like) from the unit. They could swallow the pieces and choke!

Never let children unattended use electrical devices.



DANGER!

Electric shock caused by high voltages inside

Within the device there are areas where high voltages may be present. Never remove any covers.

There are no user-serviceable parts inside.



DANGER!

Electric shock caused by short-circuit

Always use proper ready-made insulated mains cabling (power cord) with a protective contact plug. Do not modify the mains cable or the plug. Failure to do so could result in electric shock/death or fire. If in doubt, seek advice from a registered electrician.



CAUTION!

Possible hearing damage

The device can produce volume levels that may cause temporary or permanent hearing impairment. Over an extended period of time, even levels that seem to be uncritical can cause hearing damage.

Decrease the volume level immediately if you experience ringing in your ears or hearing impairment. If this is not possible, keep a greater distance or use sufficient ear protectors.



NOTICE!

Risk of fire

Do not cover the device nor any ventilation slots. Do not place the device near any direct heat source. Keep the device away from naked flames.



NOTICE!

Operating conditions

This device has been designed for indoor use only. To prevent damage, never expose the device to any liquid or moisture. Avoid direct sunlight, heavy dirt, and strong vibrations.



NOTICE!

Power supply

Before connecting the device, ensure that the input voltage (AC outlet) matches the voltage rating of the device and that the AC outlet is protected by a residual current circuit breaker. Failure to do so could result in damage to the device and possibly injure the user.

Unplug the device before electrical storms occur and when it is unused for long periods of time to reduce the risk of electric shock or fire.

3 Features

Special features of the device:

- Inputs: Two XLR sockets
- Outputs: One XLR socket for line out, one lockable NL4 socket (to connect a passive speaker)
- 10" woofer, 3" tweeter
- Volume control for mic and line input, 3 band EQ, clipping LED
- Tripod mounting thread 36 mm on the bottom
- Carpet covering
- Energy-saving mode: When the box receives no signal for one hour, it switches to standby mode. When it receives a signal again, it automatically switches back to normal mode.

4 Installation

Unpack and carefully check that there is no transportation damage before using the unit. Keep the equipment packaging. To fully protect the device against vibration, dust and moisture during transportation or storage use the original packaging or your own packaging material suitable for transport or storage, respectively.

Establish all connections as long as the unit is switched off. Use the shortest possible high-quality cables for all connections.



WARNING!

Risk of injury caused by falling objects

Make sure that the installation complies with the standards and rules that apply in your country. Always secure the device with a secondary safety attachment, such as a safety cable or a safety chain.



NOTICE!

Possible property damage by magnetic fields

Loudspeakers produce a static magnetic field. Therefore, maintain an appropriate distance to devices that can be adversely affected or damaged by an external magnetic field.



NOTICE!


Use of stands

When mounting the device onto a stand, ensure that the stand is in a safe and stable position and that the weight of the device does not exceed the maximum permissible load capacity of the stand.

4.1 Pin assignment

You can use XLR plugs with balanced or unbalanced wiring. The following will give you an overview of the various possibilities.


XLR connections for signal inputs and output

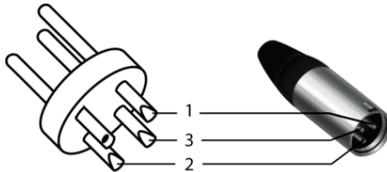

XLR mounting sockets are used for signal inputs. An XLR mounting plug provides the line out signal. Drawing and table indicate the XLR pin assignment.

Balanced wiring:

1	Ground, shielding
2	Positive signal (+)
3	Negative signal (-)

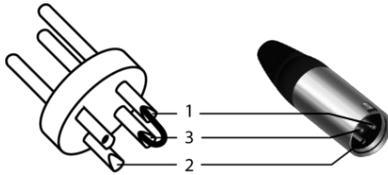


Unbalanced wiring:

1	Ground, shielding
2	Signal
3	Bridged to pin 1

NL4 mounting connection for speaker output

The drawing alongside shows the pin assignment of the lockable NL4 mounting connector.



4.2 Tips on handling speakers


We recommend you to set up the speakers in a way, that the sound signals can reach the audience unobstructedly. It will often be helpful to mount the speakers on tripods. Thus, the sound will be evenly spread with maximum range throughout the audience area.

Always use high grade cable to connect your equipment. Otherwise you won't reach maximum sound quality.

For optimum results both impedance and power handling of the speakers must match the requirements of the amplifier. Always follow the technical specifications of the speakers! The overall impedance of the connected loudspeakers must not exceed the minimum output impedance of the amp. The amps max. RMS output power should be 50 % above the power handling capacity of the connected speakers.

If you notice distortion during operation, either the amp or the speaker is overloaded. This may permanently damage the amp or the speaker. Always reduce the volume when you hear distortion.

5 Operating elements

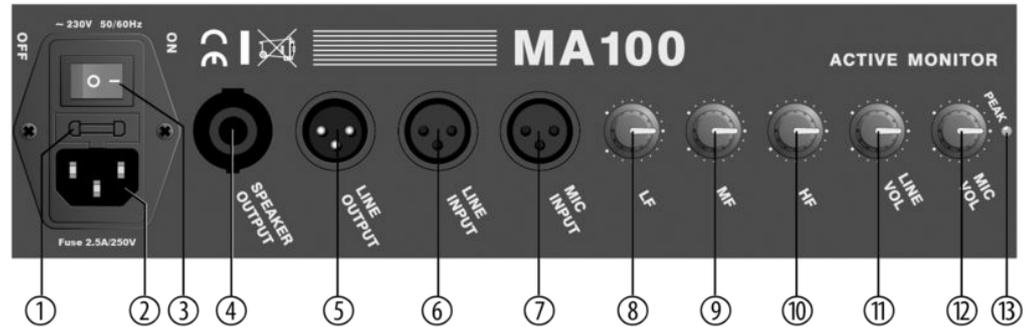

MA100

1	Mains fuse If this fuse blows, you have to replace it by a new one with same specifications. Before you must disconnect the unit from the mains power.
2	Connection for mains supply voltage Make sure that the mains switch (3) is in OFF position (O), before connecting the mains power cable here.
3	I / O (ON/OFF) Use the mains switch to power the unit on or off.
4	NL4 socket (SPEAKER OUTPUT) Lockable NL4 connector for the connection of another passive speaker box.
5	XLR socket (LINE OUTPUT) You can connect the line input of other active monitors to this line output.
6	XLR socket (LINE INPUT) You can connect the output of other line level sources (e.g. a CD player or the line out of another active monitor) to this line input.

7	XLR socket (MIC INPUT) Here you can connect microphones or the output of other sources with mic level.
8	Bass control (LF) Turn this control clockwise to increase the low frequencies. Turn it counterclockwise to attenuate these frequencies.
9	Mid control (MF) Turn this control clockwise to increase the mid frequencies. Turn it counterclockwise to attenuate these frequencies.
10	Treble control (HF) Turn this control clockwise to increase the high frequencies. Turn it counterclockwise to attenuate these frequencies.
11	Volume control (LINE VOL) Turn this control clockwise to increase the volume of the line input signal. Turn it counterclockwise to reduce the volume. Caution: First reduce the volume to minimum, before switching the unit on and transmitting signals. Then set the desired volume. Make sure, that the PEAK indicator (13) does not light up.

12 **Volume control (MIC VOL)**

Turn this control clockwise to increase the volume of the microphone input signal. Turn it counterclockwise to reduce the volume. Caution: First reduce the volume to minimum, before switching the unit on and transmitting signals. Then set the desired volume. Make sure, that the PEAK indicator (13) does not light up.

13 **PEAK**

This LED lights up, if distortion occurs due to excessive input level.

6 Technical specifications

Operating voltage	AC 230 V ~ , 50/60 Hz
System	2-way full-range active speaker with built-in crossover
Speakers	1 × 10" woofer, 3" tweeter
Dispersion (V × H)	90° × 80°
Frequency response	70 Hz ... 17 kHz (-3 dB)
THD	Line: 0,02%, microphone: 0,04%
Maximum SPL (1 m)	119 dB
Controls	2 level controls (MIC, LINE), 3 band EQ
Output power	100 W (RMS), 400 W (peak)
Load impedance	8 Ω
Input impedance	10 kΩ

Technical specifications

Dimensions (W × H × D)	360 mm × 495 mm × 310 mm
Weight	14 kg

7 Protecting the environment

Disposal of the packaging material



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling.

Ensure that plastic bags, packaging, etc. are properly disposed of.

Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

Disposal of your old device



This device is subject to the European directive 2002/96/EC.

Do not dispose of the device with your normal household waste.

Dispose of this device through an approved waste disposal firm or through your local waste facility. When discarding the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.



