




Speaker	LF18G400 LF18X400	L18P300	L18S800	L18P200N
Cabinet Type	bass-reflex	bass-reflex	bass-reflex	bass-reflex
Box Volume	180 l	180 l	150 l	180 l
Tuning frequency	35Hz	35Hz	40Hz	35Hz
A	423	416	416	416
B	440	440	390	440
C	700	700	590	700
LF limit	33Hz	33Hz	33Hz	33Hz
Sensitivity	96 dB	95,5 dB	98 dB	96 dB
Power Handling	1000 W	650 W	600 W	800 W
Program Power	2000 W	1300 W	1200 W	1600 W
Max Spl 1m	129 dB	126,5 dB	129 dB	128 dB

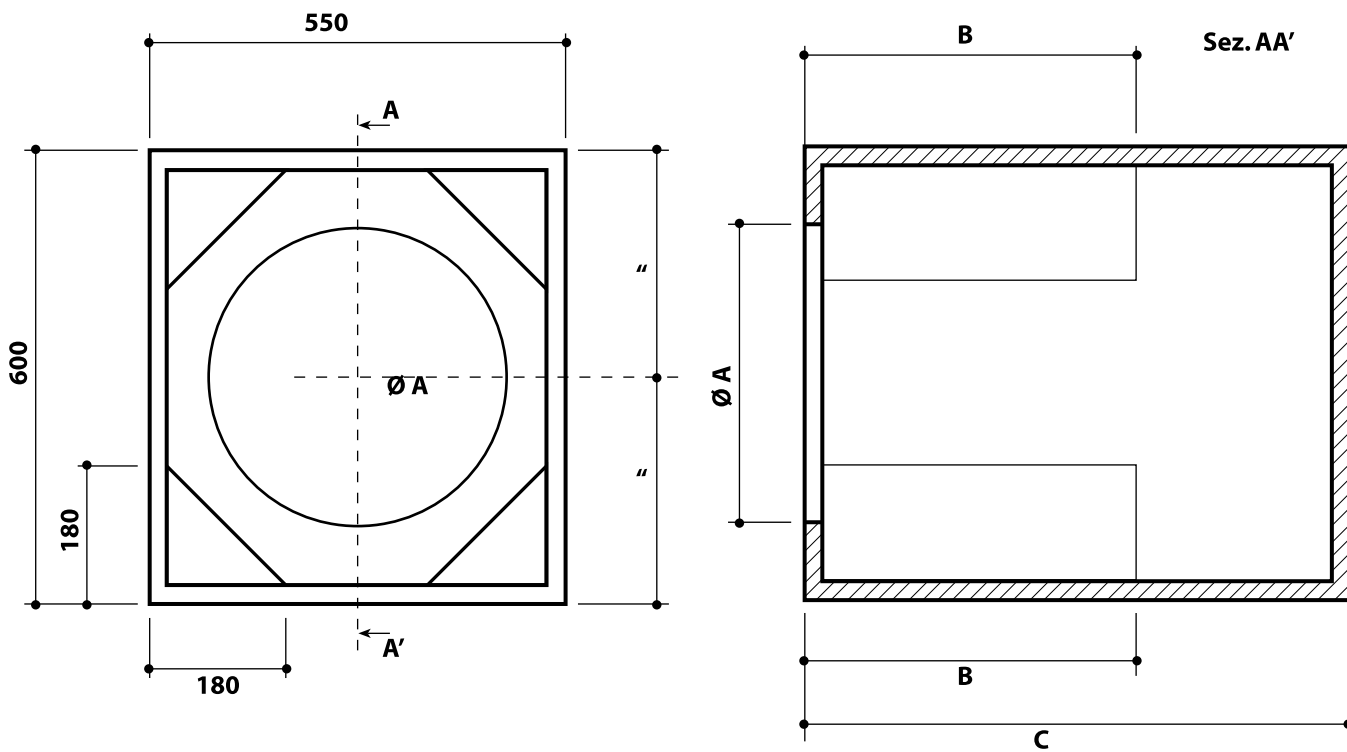


LF18X400-LF18G400

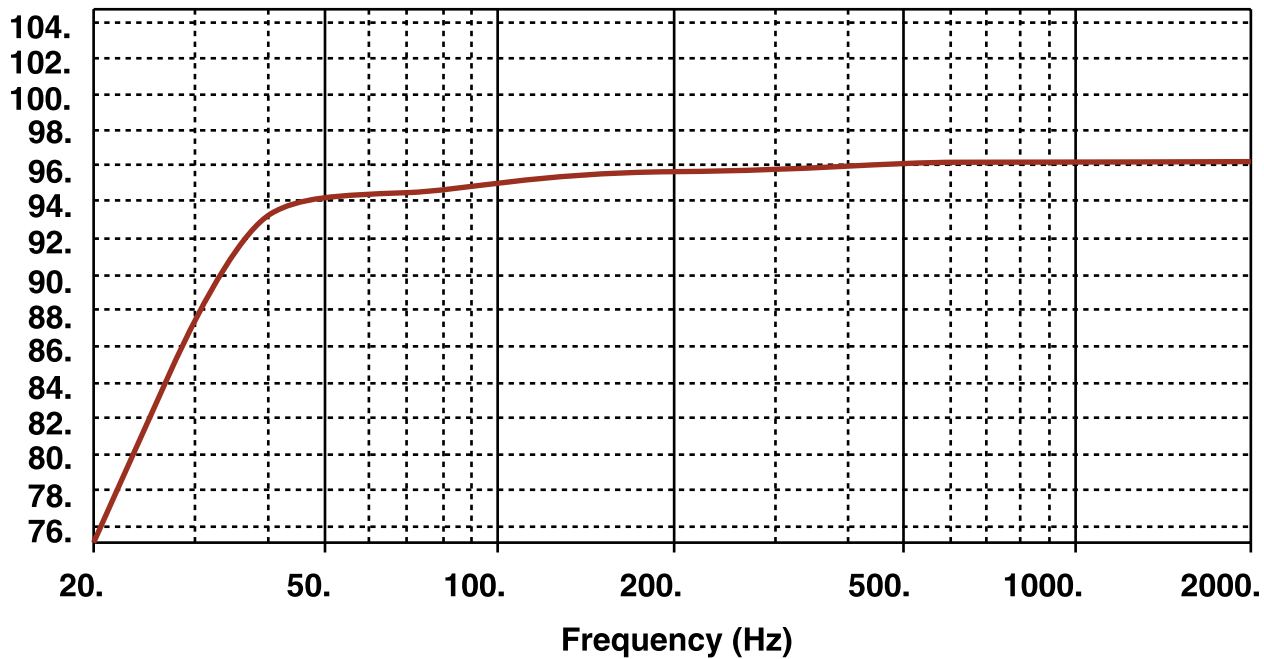

L18P200N

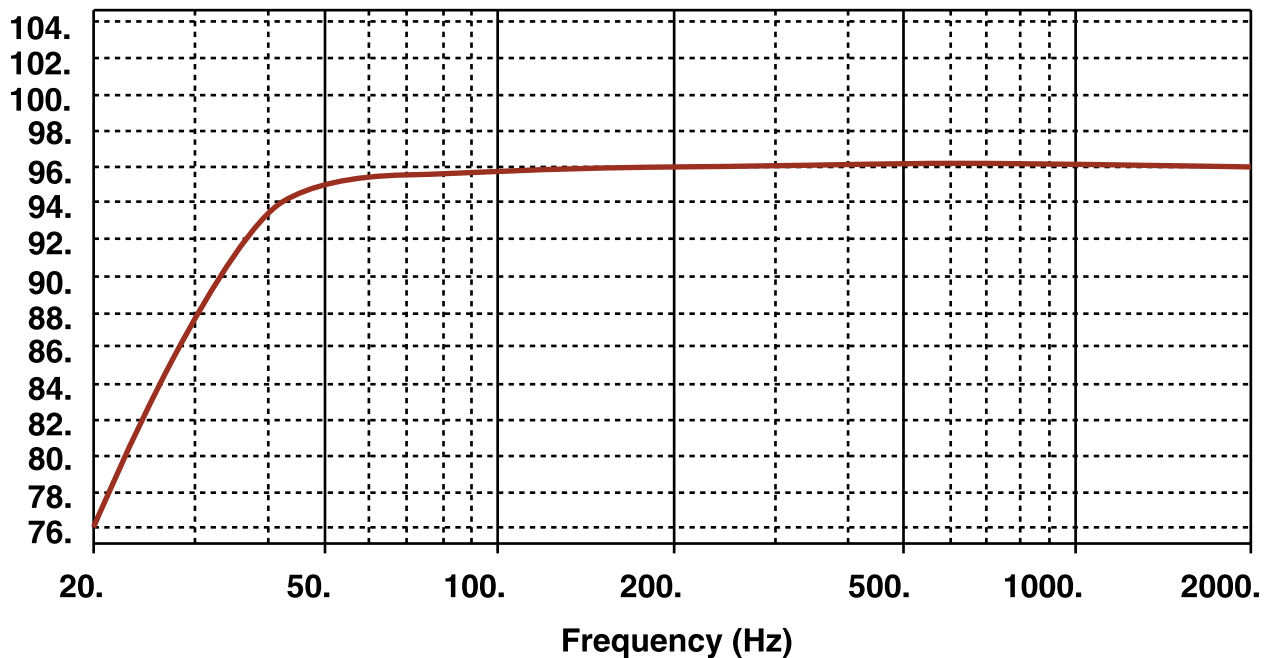

L18S800

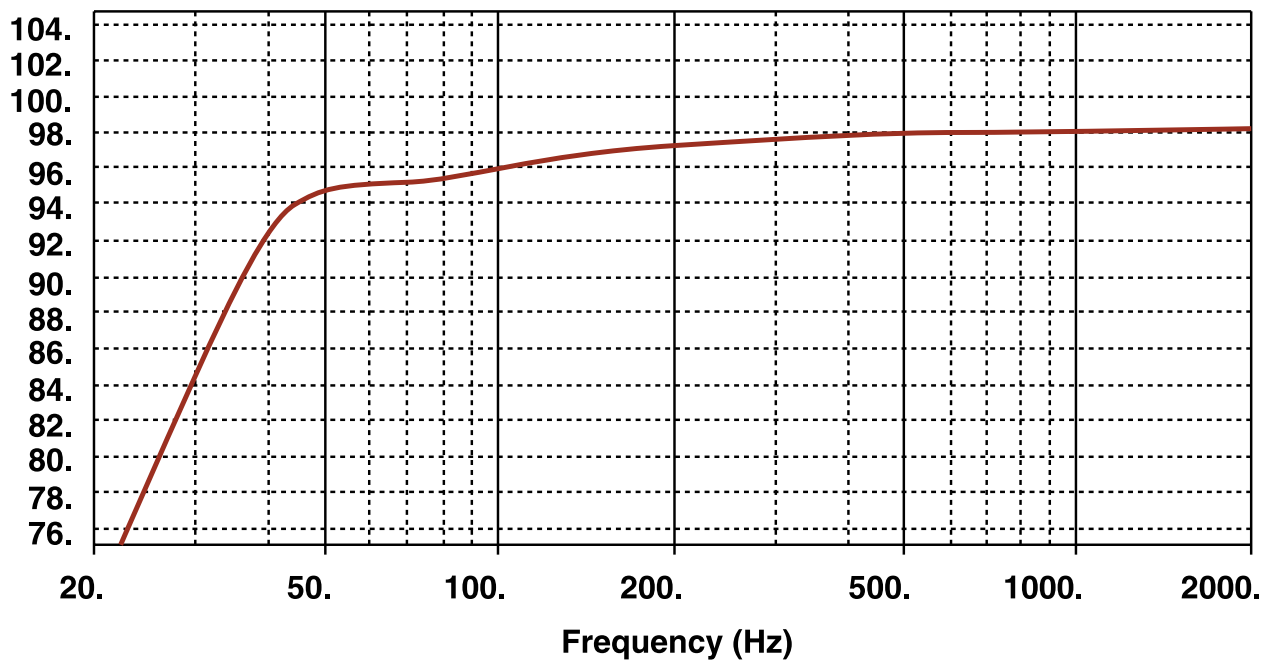

L18P200N

